

Summit X460 Series




The Summit X460 series is based on Extreme Networks® revolutionary ExtremeXOS®, a highly resilient OS that provides continuous uptime, manageability and operational efficiency. Each switch offers the same high-performance, non-blocking hardware technology, in the Extreme Networks tradition of simplifying network deployments through the use of common hardware and software throughout the network.

The Summit X460 switches are ideal campus edge switches with IEEE 802.3at PoE-plus and ideal aggregation switches for traditional enterprise networks. The Summit X460 series is a great option for DSLAM or CMTS aggregation, or for active Ethernet access.

The Summit X460 is also purpose-built as a top-of-rack switch for many data center environments with features such as high-density Gigabit Ethernet for concentrated data center environments; XNV™ (ExtremeXOS Network Virtualization) for centralized network-based Virtual Machine (VM) inventory, VM location history and VM provisioning; Direct Attach™ to offload VM switching from servers, thereby improving performance; high-capacity Layer 2/Layer 3 scalability for highly virtualized data centers; and intra-rack and cross-rack stacking with industry-leading flexibility.

Target Applications

- Advanced campus networks or core switch for small networks
- Aggregation switch in a traditional three-tiered network
- Top-of-rack switch for data centers with optional high-speed 80 Gbps cross-rack stacking at up to 100 meters
- Interconnect switch providing low latency connections for High Performance Cluster Computing (HPCC)
- DSLAM aggregation, active Ethernet access or access aggregation device in a Carrier Ethernet network
- Access or access aggregation switch in a business E-Line or E-LAN over VPLS network

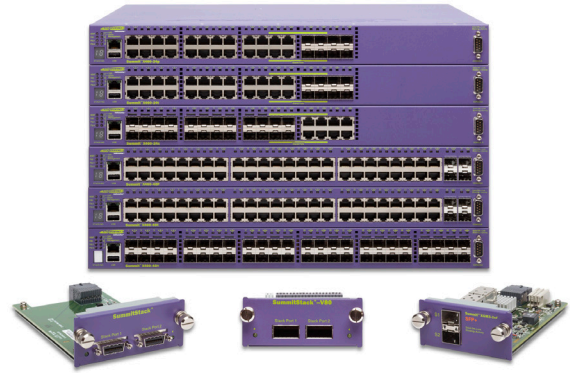

Summit® X460 series—the scalable advanced aggregation and edge switch with the revolutionary modular operating system, ExtremeXOS®.

High Performance Switching and Routing

- 52-port, 48-port or 28-port Gigabit Ethernet (GbE) connectivity in a 1RU form factor
- Optional two-port 10 GbE to provide 20 Gbps uplinks
- Voice-grade SummitStack™ 40 Gbps or SummitStack-V80 80 Gbps high-speed stacking or SummitStack-V, longer distance stacking
- Flexible IEEE 802.3at Power over Ethernet Plus (PoE-plus) to meet the growing demand of converged network applications
- Advanced Layer 2/Layer 3 switching and MPLS/H-VPLS support

Comprehensive Security Management

- User policy and host integrity enforcement, and identity management
- Universal Port Dynamic Security Profiles to provide fine granular security policies in the network
- Threat detection and response instrumentation to react to network intrusion with CLEAR-Flow Security Rules Engine
- Denial of Service (DoS) protection and IP security against man-in-the-middle and DoS attacks to harden the network infrastructure

Performance, Availability and Convergence

- Modular ExtremeXOS Operating System (OS)
- Ethernet Automatic Protection Switching (EAPS) resiliency protocol
- Dual, hot-swappable AC/DC power supplies and hot swappable fan tray



Make Your Network Mobile

High-Performance and Scalable Switching and Routing

Summit X460 offers sophisticated intelligent switching and routing with exceptional port density, scalability and virtualization support plus high-performance stacking technology powered by the ExtremeXOS modular OS.

Summit X460 helps enhance the data center, Carrier Ethernet and enterprise campus edge and aggregation network.

High-Performance Switching and Routing

Summit X460 is available in six different port configuration options: 28-port Gigabit Ethernet (Summit X460-24t/24p/24x), 48-port fiber Gigabit Ethernet (Summit X460-48x), or 52-port Gigabit Ethernet (Summit X460-48t/48p). All ports run at non-blocking, wire-speed performance and can carry wire-rate traffic to the option slots, which allow flexible configuration. Option slot A supports a two-port 10 GbE module (XGM3-2sf). For SummitStack stacking ports, a two-port SummitStack module or two-port SummitStack-V80 module can be installed in option slot B (See Figure 1: Port configuration options for Summit X460 switches).

Flexible Port Configuration

Summit X460 offers flexible port configurations. For Summit X460-24t/24p, with four dedicated Gigabit Ethernet fiber ports and four shared Gigabit Ethernet fiber ports, the switch can have up to 8 fiber GbE ports, while still providing 20 Gigabit Ethernet copper ports (PoE-plus or non-PoE). If higher density copper ports are required, the switch can provide up to 24 Gigabit Ethernet copper ports while providing 4 Gigabit Ethernet fiber ports. Through the two option slots, Summit X460 switches can be equipped with an additional two 10 Gigabit Ethernet and/or SummitStack stacking ports. For stacking, depending upon the needs for bandwidth across the units in a stack, Summit X460 supports 40 Gbps SummitStack or 80 Gbps SummitStack-V80 stacking option modules (see Figure 2: Summit X460-24t flexible port configuration).

SummitStack and SummitStack-V80—High-Performance Stacking

Summit X460 supports SummitStack, which provides 40 Gbps (SummitStack module) or 80 Gbps (SummitStack-V80 module) of stacking bandwidth. The SummitStack module offers high-speed 40 Gbps stacking performance, and provides compatibility with the Summit X250e, X450a/e, X480 and X650 stackable switches running the same version of ExtremeXOS.

Alternatively, you may choose high-speed 80 Gbps stacking, which is ideal for demanding applications where a high volume of traffic traverses through the stacking links, yet bandwidth is not compromised through stacking.

SummitStack-V80 also breaks the distance limitation for stacking technology by using QSFP+ technology. SummitStack-V80 can support passive copper cable (up to 3m), active multi-mode fiber cable (up to 100m), and QSFP+ optical transceivers which will be the standard technology for 40 GbE. With SummitStack-V80, the Summit X460 provides a flexible stacking solution inside the data center or central office to create a virtualized switching infrastructure across rows of racks. (See Figure 3: SummitStack-V80 across Rows of Racks and Figure 4: 40 GbE Cabling for SummitStack-V80) SummitStack-V80 is compatible with Summit X460, X480 and X670V switches running the same version of ExtremeXOS.

SummitStack-V—Flexible Stacking Over 10 Gigabit Ethernet

ExtremeXOS supports the new SummitStack-V capability to utilize 10 GbE ports as stacking ports, enabling the use of standard cabling and optics technologies used for 10 GbE such as XFP, SFP+, 10GBASE-T and XENPAK. SummitStack-V provides long-distance stacking connectivity of up to 40 km while reducing the cable complexity of implementing a stacking solution. SummitStack-V is compatible with Summit X450e, X450a, X460, X480, X650, X670 and X670V switches running the same version of ExtremeXOS. SummitStack-V enabled 10 GbE ports must be physically direct-connected.



High-Performance and Scalable Switching and Routing

	None (default option)		Option Slot A	Option Slot B	
	Dedicated	Shared	XGM3-2sf	SummitStack	SummitStack-V80
Summit X460-24t	<ul style="list-style-type: none"> 20 x 10/100/1000BASE-T (RJ45) 4 x 100/1000BASE-X (SFP) 	<ul style="list-style-type: none"> 4 x 100/1000BASE-X SFP or 10/100/1000BASE-T 	2 x 10GBASE-X (SFP+)	2 x SummitStack	2 x SummitStack-V80
Summit X460-48t	<ul style="list-style-type: none"> 48 x 10/100/1000BASE-T (RJ45) 4 x 100/1000BASE-X (SFP) 	None	2 x 10GBASE-X (SFP+)	2 x SummitStack	2 x SummitStack-V80
Summit X460-24p	<ul style="list-style-type: none"> 20 x 10/100/1000BASE-T PoE-plus (RJ45) 4 x 100/1000BASE-X (SFP) 	<ul style="list-style-type: none"> 4 x 100/1000BASE-X SFP or 10/100/1000BASE-T PoE-plus 	2 x 10GBASE-X (SFP+)	2 x SummitStack	2 x SummitStack-V80
Summit X460-48p	<ul style="list-style-type: none"> 48 x 10/100/1000BASE-T PoE-plus (RJ45) 4 x 100/1000BASE-X (SFP) 	None	2 x 10GBASE-X (SFP+)	2 x SummitStack	2 x SummitStack-V80
Summit X460-24x	<ul style="list-style-type: none"> 4 x 10/100/1000BASE-T (RJ45) 20 x 100/1000BASE-X (SFP) 	<ul style="list-style-type: none"> 4 x 100/1000BASE-X SFP or 10/100/1000BASE-T 	2 x 10GBASE-X (SFP+)	2 x SummitStack	2 x SummitStack-V80
Summit X460-48x	<ul style="list-style-type: none"> 48 x 100/1000BASE-X (SFP) 	None	2 x 10GBASE-X (SFP+)	2 x SummitStack	2 x SummitStack-V80
Summit X460-24tDC	<ul style="list-style-type: none"> 20 x 10/100/1000BASE-T (RJ45) 4 x 100/1000BASE-X (SFP) 	<ul style="list-style-type: none"> 4 x 100/1000BASE-X SFP or 10/100/1000BASE-T 	2 x 10GBASE-X (SFP+)	2 x SummitStack	2 x SummitStack-V80
Summit X460-48tDC	<ul style="list-style-type: none"> 48 x 10/100/1000BASE-T (RJ45) 4 x 100/1000BASE-X (SFP) 	None	2 x 10GBASE-X (SFP+)	2 x SummitStack	2 x SummitStack-V80
Summit X460-24xDC	<ul style="list-style-type: none"> 4 x 10/100/1000BASE-T (RJ45) 20 x 100/1000BASE-X (SFP) 	<ul style="list-style-type: none"> 4 x 100/1000BASE-X SFP or 10/100/1000BASE-T 	2 x 10GBASE-X (SFP+)	2 x SummitStack	2 x SummitStack-V80
Summit X460-48xDC	<ul style="list-style-type: none"> 48 x 100/1000BASE-X (SFP) 	None	2 x 10GBASE-X (SFP+)	2 x SummitStack	2 x SummitStack-V80

Figure 1: Port Configuration Options for Summit X460 Switches

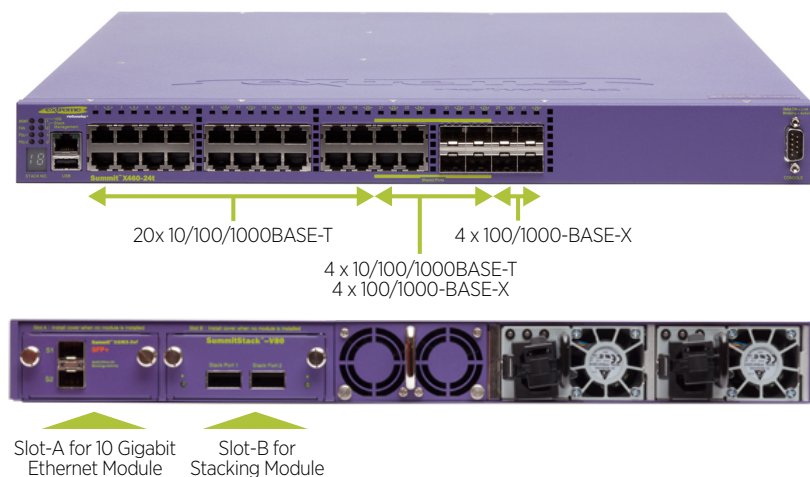


Figure 2: Summit X460-24t Flexible Port Configuration



High-Performance and Scalable Switching and Routing

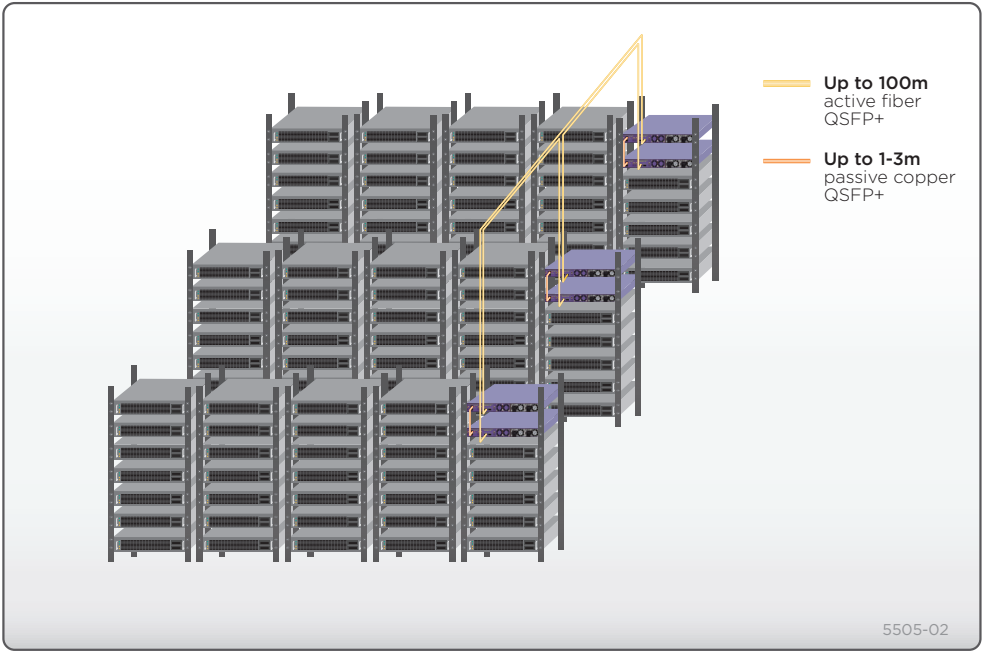


Figure 3: SummitStack-V80 Stacking Across Rows of Racks

.....




	Passive Copper Cable	Active Fiber Cable	SR
Media Type	Copper	MMF	MMF
Connector Type	Not Applicable	Not Applicable	MPO
Distance Range	Up to 5m	Up to 100m	Up to 100m
Image			

Figure 4: SummitStack-V80 Cabling



High-Performance and Scalable Switching and Routing

Intelligent Switching and MPLS/H-VPLS Support

Summit X460 supports sophisticated and intelligent Layer 2 switching, as well as Layer 3 IPv4/IPv6 routing including policy-based switching/routing, Provider Bridges, bidirectional ingress and egress Access Control Lists, and bandwidth control by 8 Kbps granularity both for ingress and egress. To provide scalable network architectures used mainly for Carrier Ethernet network deployment, Summit X460 supports MPLS LSP-based

Layer 3 forwarding and Hierarchical VPLS (H-VPLS) for transparent LAN services. With H-VPLS, transparent Layer 3 networks can be extended throughout the Layer 3 network cloud by using a VPLS tunnel between the regional transparent LAN services typically built by Provider Bridges (IEEE 802.1ad) technology (See Figure 5: Summit X460 in a Carrier Ethernet application).

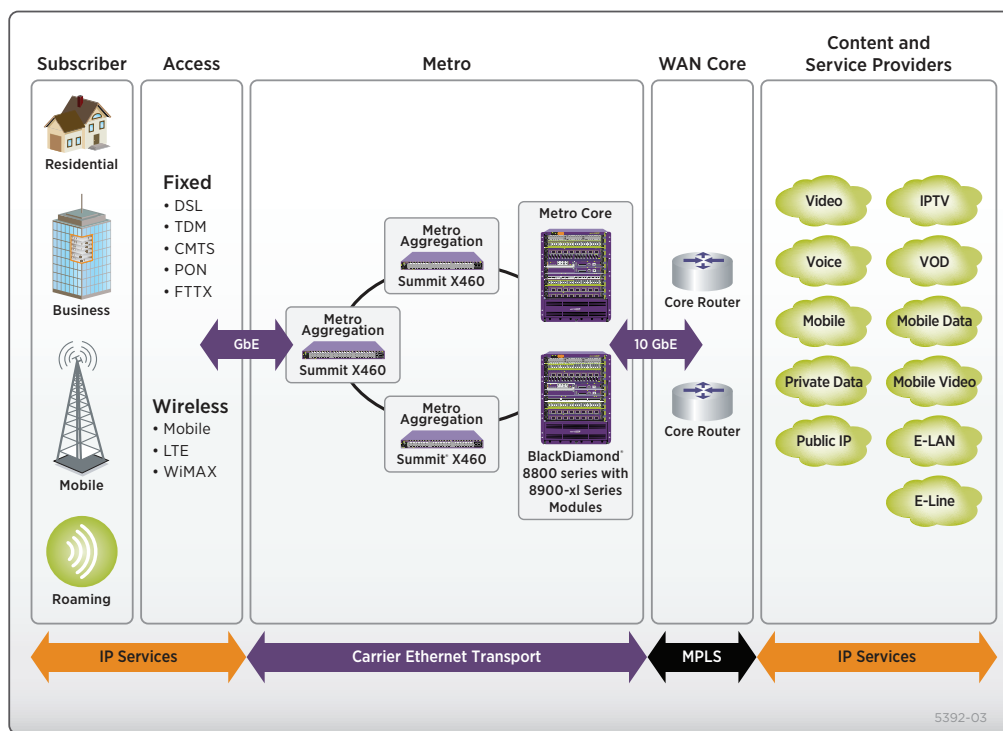


Figure 5: Summit X460 in a Carrier Ethernet Application

IEEE 802.3at PoE-plus

IEEE 802.3af Power over Ethernet has been widely used in the campus enterprise edge network for Ethernet-powered devices such as wireless access points, Voice over IP phones, and security cameras. Ethernet port extenders such as Extreme Networks ReachNXT™ 100-8t can also utilize PoE, making installation and management easier and reducing

maintenance costs. The newer IEEE 802.3at PoE-plus standard expands upon Power over Ethernet by increasing the power limit up to 30 watts, and by standardizing power negotiation by using LLDP. Summit X460 supports IEEE 802.3at PoE-plus and supports standards-compliant PoE devices today and into the future.



Comprehensive Security Management

Implementing a secure network means providing protection at the network perimeter as well as the core.

Extreme Networks security offerings encompass three key areas: user and host integrity, threat detection and response, and hardened network infrastructure. Furthermore, with policy-based routing, measures can be taken to provide confidentiality of selective data in transit between internal network nodes.

User Authentication and Host Integrity Checking

Network Login and Dynamic Security Profile

Network Login capability implemented in ExtremeXOS enforces user admission and usage policies. Summit X460 series switches support a comprehensive range of Network Login options by providing an 802.1X agent-based approach, a Web-based (agent-less) login capability for guests, and a MAC-based authentication model for devices. With these modes of Network Login, only authorized users and devices can connect to the network and be assigned to the appropriate VLAN. The Universal Port scripting framework available in Summit X460 lets you implement Dynamic Security Profiles, which in sync with Network Login allow you to implement fine-grained and robust security policies. Upon authentication, the switch can load dynamic ACLs/QoS profiles for a user or group of users, to deny/allow the access to the application servers or segments within the network.

Multiple Supplicant Support

Shared ports represent a potential vulnerability in a network. Multiple supplicant capability on a switch allows it to uniquely authenticate and apply the appropriate policies and VLANs for each user or device on a shared port. Multiple supplicant support secures IP Telephony and wireless access. Converged network designs often involve the use of shared ports.

Media Access Control (MAC) Lockdown

MAC lockdown secures printers, wireless APs and servers. The MAC address security/lockdown feature allows Summit X460 to block access to any Ethernet port when the MAC address of a station attempting to access the port is different from the configured MAC address. This feature is used to “lock down” a device to a specific port.

Host Integrity Checking

Host integrity checking helps keep infected or noncompliant machines off the network. Summit X460 series switches support a host integrity or endpoint integrity solution that is based on the model from the Trusted Computing Group.

Identity Manager

Identity Manager allows network managers to track users who access their network. User identity is captured based on NetLogin authentication, LLDP discovery and Kerberos snooping. ExtremeXOS uses the information to then report on the MAC, VLAN, computer hostname, and port location of the user.

Further, Identity Manager can create both roles and policies, and then bind them together to create role-based profiles based on organizational structure or other logical groupings, and apply them across multiple users to allow appropriate access to network resources. In addition, support for Wide Key ACLs further improves security by going beyond the typical source/destination and MAC address as identification criteria access mechanism to provide filtering capabilities.

Network Intrusion Detection and Response

Hardware-based sFlow Sampling

sFlow® is a sampling technology that provides the ability to continuously monitor application-level traffic flows on all interfaces simultaneously. The sFlow agent is a software process that runs on Summit X460 and packages data into sFlow datagrams that are sent over the network to an sFlow collector. The collector gives an up-to-the-minute view of traffic across the entire network, providing the ability to troubleshoot network problems, control congestion and detect network security threats.

IPFIX Hardware Support

IPFIX (Internet Protocol Flow Information eXport) defines an Internet standards-track protocol for a follow-on protocol to the proprietary Netflow. The technology is a complimentary protocol to sFlow. IPFIX gathers information about network flows through the switch and sends the information to an external collector. Summit X460 includes hardware support to keep track of the flow records.



Comprehensive Security Management

Port Mirroring

To allow threat detection and prevention, Summit X460 switches support many-to-one and one-to-many port mirroring. This allows the mirroring of traffic to an external network appliance such as an intrusion detection device for trend analysis or for utilization by a network administrator for diagnostic purposes. Port mirroring can also be enabled across switches in a stack.

Line-Rate ACLs

ACLs are one of the most powerful components used in controlling network resource utilization as well as protecting the network. Summit X460 switches support 2,048 centralized ACLs per 24 or 28-port block based on Layer 2, 3 or 4 header information such as the MAC or IP source/destination address. ACLs are used for filtering the traffic, as well as classifying the traffic flow to control bandwidth, priority, mirroring and policy-based routing/switching.

Denial of Service Protection

Summit X460 switches effectively handle DoS attacks. If the switch detects an unusually large number of packets in the CPU input queue, it will assemble ACLs that automatically stop these packets from reaching the CPU. After a period of time, these ACLs are removed, and reinstalled if the attack continues. ASIC-based LPM routing eliminates the need for control plane software to learn new flows, allowing more network resilience against DoS attacks.

Secure Management

To prevent management data from being intercepted or altered by unauthorized access, Summit X460 switches support SSH2, SCP and SNMPv3 protocols. The MD5 hash algorithm used in authentication prevents attackers from tampering with valid data during routing sessions.

Extreme Networks has developed tools that simplify and help in efficiently managing your network. Ridgeline™ network and service management provides fault, configuration, accounting, performance and security functions, allowing more effective management of Extreme Networks products, solutions and third-party devices, in a converged network.



Performance, Availability and Convergence

Powered by the ExtremeXOS OS, Summit X460 supports process recovery and application upgrades without the need for a system reboot. Summit X460 provides the high network availability required for mission-critical servers and applications through its advanced modular OS, highly available hardware architecture and carrier-grade network redundancy protocols.

Modular Operating System for Continuous Operation

Preemptive Multitasking and Protected Memory

Summit X460 series switches allow each of many applications—such as Open Shortest Path First (OSPF) and Spanning Tree Protocol (STP)—to run as separate OS processes that are protected from each other. This drives increased system integrity and inherently protects against DoS attacks.

Process Monitoring and Restart

ExtremeXOS increases network availability using process monitoring and restart. Each independent OS process is monitored in real time. If a process becomes unresponsive or stops running, it can be automatically restarted.

Loadable Software Modules

The modular design of ExtremeXOS OS allows the upgrading of individual software modules, should this be necessary, leading to higher availability in the network (See Figure 7: ExtremeXOS modular design).

High Availability Network Protocols

Ethernet Automatic Protection Switching (EAPS)

EAPS allows the IP network to provide the level of resiliency and uptime that users expect from their traditional voice network. EAPS is more adaptable than Spanning Tree or Rapid Spanning Tree Protocols and offers sub-second (less than 50 milliseconds) recovery that delivers consistent failover regardless of the number of VLANs, network nodes or network topology. Since EAPS allows the network to recover almost transparently, Voice-over-IP (VoIP) calls will not drop and digital video feeds will not freeze or pixelize in most situations.

Spanning Tree/Rapid Spanning Tree Protocols

Summit X460 supports Spanning Tree (802.1D), Per VLAN Spanning Tree (PVST+), Rapid Spanning Tree (802.1w) and Multiple Instances of Spanning Tree (802.1s) protocols for Layer 2 resiliency.

Software-Enhanced Availability

Software-enhanced availability allows users to remain connected to the network even if part of the network infrastructure is down. Summit X460 continuously checks for problems in the uplink connections using advanced Layer 3 protocols such as OSPF, VRRP and Extreme Standby Router Protocol™ (ESRP, supported in Layer 2 or Layer 3), and dynamically routes traffic around the problem.

Equal Cost Multipath

Equal Cost Multipath (ECMP) routing allows uplinks to be load balanced for performance and cost savings while also supporting redundant failover. If an uplink fails, traffic is automatically routed to the remaining uplinks and connectivity is maintained.

Link Aggregation (802.3ad)

Link aggregation (LAG) allows trunking of up to eight links on a single logical connection. A maximum of 128 link aggregation groups can be created.

Multi-Switch LAG (M-LAG)

M-LAG can address bandwidth limitations and improve network resiliency, in part by routing network traffic around bottlenecks, reducing the risks of a single point of failure, and allowing load balancing across multiple switches.

Voice-Grade Stacking with SummitStack

Summit X460 provides high-speed 40 Gbps stacking and 80 Gbps stacking through optional stacking modules, as well as 10 GbE stacking through SummitStack-V. The SummitStack stacking architecture is designed to support mission-critical applications through its highly available, rapid failover capability with n-1 master redundancy, distributed Layer 2 and Layer 3 switching, link aggregation across the stack, and distributed uplinks. SummitStack supports up to eight units in a stack, including any mix of Summit X460, X480, X650, X450a, X450e, and X250e, and provides 50 milliseconds failover for path failure and hitless master/backup failover along with hitless protocol support such as OSPF graceful restart and Network Login user authentication. Summit X460 provides chassis-like management and availability with its SummitStack stacking technology (See Figure 8: SummitStack stacking architecture).



Performance, Availability and Convergence

Hardware Redundancy

Summit X460 supports a dual redundant AC/ DC power supply to provide high availability. The power supply can be hot-swapped and replaced should it fail. For non-PoE models, Summit X460 allows AC and DC power supplies to be mixed in the same switch to provide a DC-powered main power source and AC power from a UPS backup. Summit X460 supports a hot-swappable, field replaceable fan.

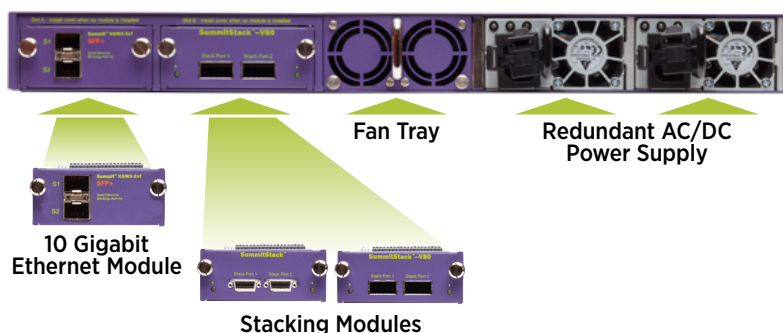


Figure 6: Summit X460 High Availability Design

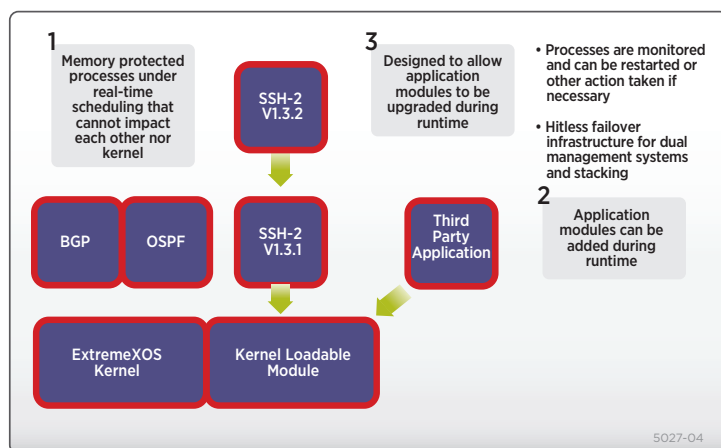


Figure 7: ExtremeXOS Modular Design

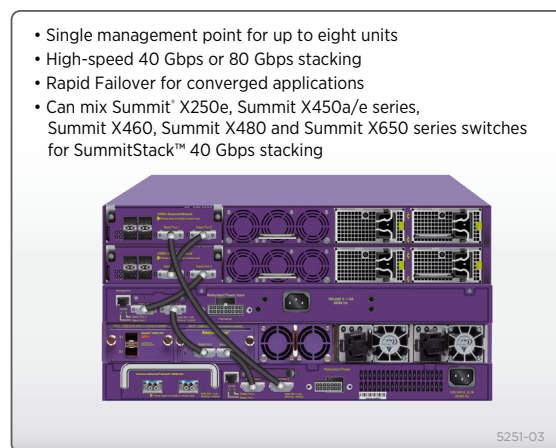


Figure 8: SummitStack Stacking Architecture



Target Applications

Data Center Top-of-Rack Switch

Virtualization, rack servers and blade servers have enabled a high degree of consolidation within the enterprise data center rack. Data center consolidation has led to a need for higher switch density and advanced virtualization capabilities in the top-of-rack switch. Summit X460 provides an ideal combination of Layer 2/Layer 3 scale, port density and virtualization support for the highly virtualized and cloud-based enterprise data center.

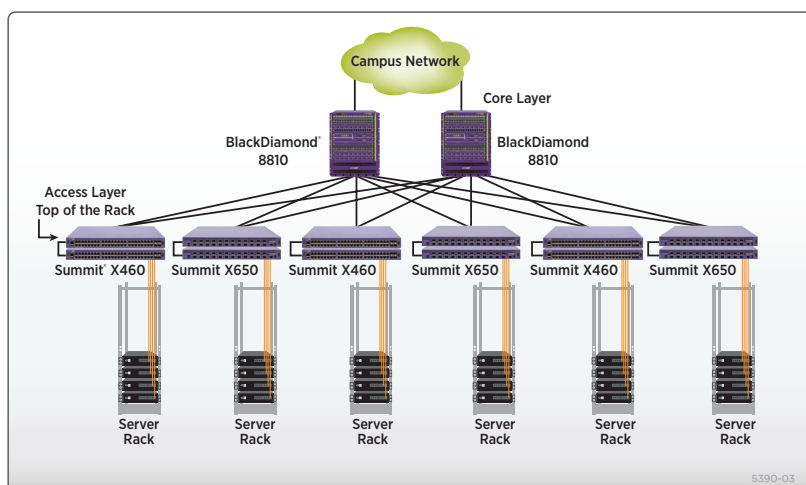


Figure 9: Top-of-Rack Architecture

High-Performance 10 Gigabit Core Switch for a Small Network and Aggregation Switch in a Traditional Three-Tier Network

Summit X460 offers superior aggregation-class scalability for both Layer 2 and Layer 3 switching. Summit X460 can support up to 32,000 Layer 2 MAC addresses and 12,000 IPv4 longest prefix matching routes.

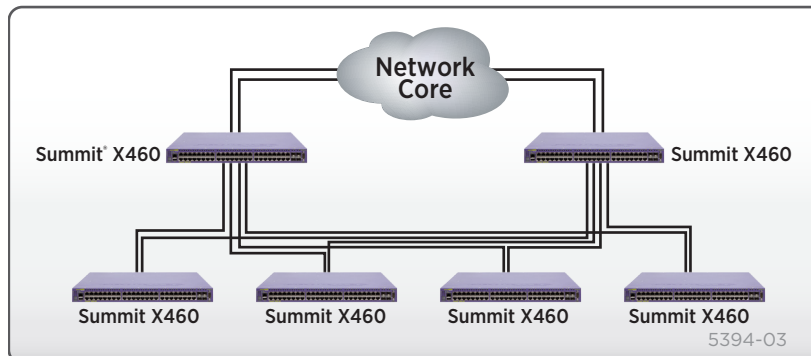


Figure 10: Summit X460 as an Aggregation Switch in a Three-Tier Network

Edge Switch for High-Bandwidth Applications

Here, the Summit X460 switch is deployed as an edge switch, extending the benefits of the ExtremeXOS operating system to the network edge. This uniformity provides consistent quality and performance throughout your converged network while reducing operational inefficiencies. With line-rate performance and low latency, the Summit X460 edge switch connects wireless devices, LAN telephony, PDAs and other equipment without compromising security, scalability, availability, mobility or management.

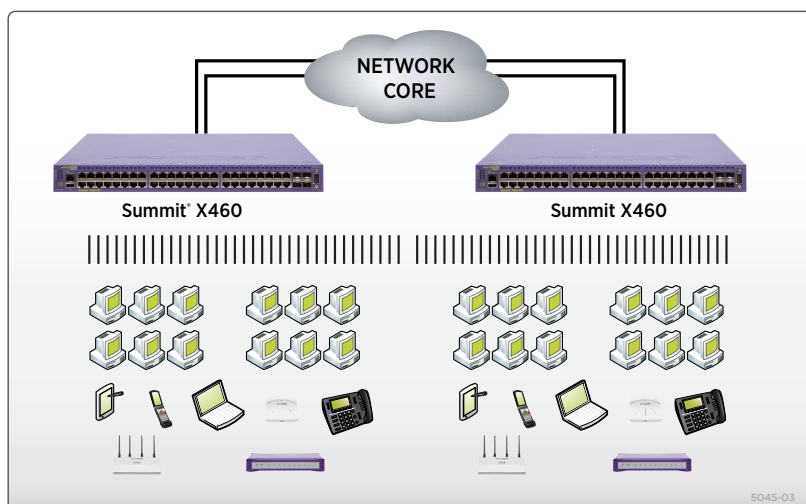


Figure 11: Summit X460 Switches in a Campus Enterprise Edge Application



Target Applications

Carrier Ethernet Network Switch that can Aggregate Connectivity for First Mile Access Concentrators

Summit X460 switches are an ideal service delivery platform for Carrier Ethernet networks. The advanced traffic management, resiliency and scalability features give it the flexibility to be deployed at the Provider Edge or as an aggregation switch. By supporting scalable Layer 2 and Layer 3 features along with MPLS/H-VPLS in hardware, the Summit X460 switches simplify network deployment.

Supported Protocols and Standards

A list of supported protocols and standards is available on the Extreme Networks website at: <http://www.extremenetworks.com/go/xos>

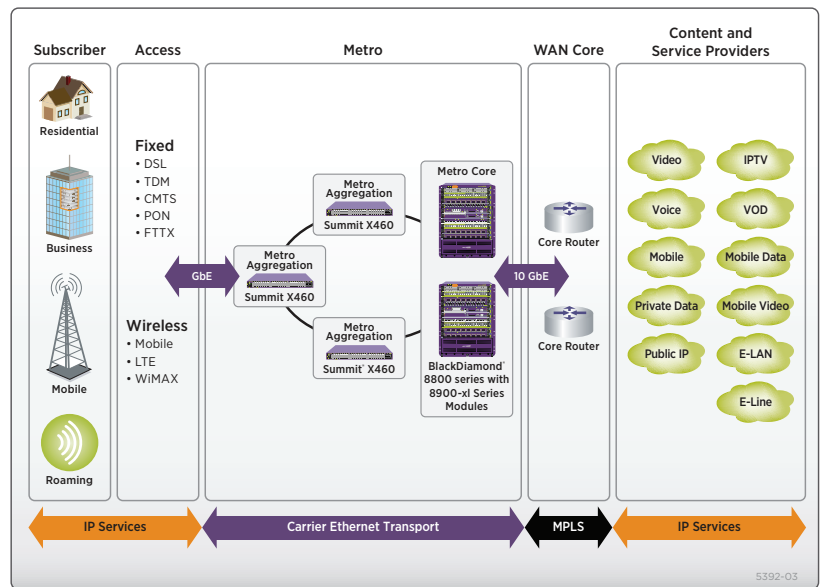


Figure 12: Summit X460 as an Aggregation Switch in a Carrier Ethernet Application



Technical Specifications

Summit X460

General Specifications

Performance

- 176 Gbps (24t/24p/24x), 328 Gbps (48t/p), 320 Gbps (48x) aggregated switch bandwidth
- 130.9 Mpps (24t/24p/24x), 166.7 Mpps (48t/48p) and 160.7 Mpps (48x) frame forwarding rate
- Less than 4 microsecond latency (64-byte)
- 9216 Byte maximum packet size (Jumbo Frame)
- 128 load sharing trunks, up to 8 members per trunk
- 4,094 VLANs (Port, Protocol, IEEE 802.1Q)
- 4,192 ingress and 512 egress ACL rules, meters and counters/24-port

Forwarding Tables

- Layer 2/MAC Addresses: 32K
- IPv4 LPM Entries: 12K
- IPv6 LPM Entries: 6K

CPU, Memory

- 64-bit MIPS Processor, 600 MHz clock
- 1GB ECC DRAM
- 1GB Compact Flash
- USB port for external USB flash

QoS, Rate Limiting

- 4,096 ingress bandwidth meters/24 ports
- Ingress and egress bandwidth policing/rate limiting per flow/ACL
- 8 QoS egress queues/port
- Egress bandwidth rate shaping per egress queue and per port
- Rate Limiting Granularity: 8 Kbps

LED Indicators

- Per port status LED including power status
- System Status LEDs: management, fan and power

External Ports

- 24-port 10/100/1000BASE-T, 8-port 100/1000BASE-X unpopulated SFP (4 SFP ports shared with 10/100/1000BASE-T ports), slot for optional XGM3-2sf module(s), slot for optional stacking module (Summit X460-24t)
- 48 10/100/1000BASE-T, 4 100/1000BASE-X unpopulated SFP, slot for optional XGM3-2sf module(s), slot for optional stacking module (Summit X460-48t)
- 24-port 10/100/1000BASE-T PoE-plus, 8-port 100/1000BASE-X unpopulated SFP (4 SFP ports shared with 10/100/1000BASE-T ports), slot for optional XGM3-2sf module(s), slot for optional stacking module

(Summit X460-24p)

- 48-port 10/100/1000BASE-T PoE-plus, 4-port 100/1000BASE-X unpopulated SFP, slot for optional XGM3-2sf module(s), slot for optional stacking module (Summit X460-48p)
- 24-port 100/1000BASE-X unpopulated SFP, 8-port 10/100/1000BASE-T (4 10/100/1000BASE-T ports shared with SFP ports), slot for optional XGM3-2sf module(s), slot for optional stacking module (Summit X460-24x)
- 48-port 100/1000BASE-X unpopulated SFP, slot for optional XGM3-2sf module(s), slot for optional stacking module (Summit X460-48x)

Option Slots

- XGM3 slot (slot A)
- Stacking module slot (slot B)

External Ports for XGM3 Module (slot A)

- 2-port 10GBASE-X SFP+ (XGM3-2sf)

External Ports for Stacking Module (slot B)

- 2-port 20G SummitStack module
- 2-port 40G SummitStack-V80 module

Power Supply Support

- Summit 300W AC PSU
- Summit 300W DC PSU
- Summit 750W AC PoE PSU

Fan Speed

- Minimum speed 2500 RPM
- Maximum speed 15900 RPM

Storage & Transportation Conditions (Packaged)

- Transportation Temperature: -40° C to 70° C (-40° F to 158° F)
- Storage and Transportation Humidity: 10% to 95% RH, non-condensing
- Packaged Shock (Half Sine): 180 m/s² (18 G), 6ms, 600 shocks
- Packaged Sine Vibration: 5-62 Hz @ Velocity 5mm/s, 62-500 Hz @ 0.2G
- Packaged Random Vibration: 5-20 Hz @ 1.0 ASD w/-3dB/oct. from 20-200 Hz
- 14 drops min on sides & corners @ 42" (<15 kg box)

Safety Standards

North American Safety of ITE

- UL 60950-1 2nd Ed., Listed Device (U.S.)
- CSA 22.2 #60950-1-03 2nd Ed. (Canada)
- Complies with FCC 21CFR 1040.10 (U.S. Laser Safety)
- CDRH Letter of Approval (US FDA Approval)

European Safety of ITE

- EN 60950-1:2007 2nd Ed.
- EN 60825-1+A2:2001 (Lasers Safety)
- TUV-R GS Mark by German Notified Body
- 2006/95/EC Low Voltage Directive

International Safety of ITE

- CB Report & Certificate per IEC 60950-1 2nd Ed. + National Differences
- AS/NZX 60950-1 (Australia /New Zealand)

EMI/EMC Standards

North America EMC for ITE

- FCC CFR 47 part 15 Class A (USA)
- ICES-003 Class A (Canada)

European EMC Standards

- EN 55022:2006+A1:2007 Class A
- EN 55024:A2-2003 Class A includes IEC 61000-4-2, 3, 4, 5, 6, 11
- EN 61000-3-2,8-2006 (Harmonics)
- EN 61000-3-3 2008 (Flicker)
- ETSI EN 300 386 v1.4.1, 2008-04 (EMC Telecommunications)
- 2004/108/EC EMC Directive

International EMC Certifications

- CISPR 22: 2006 Ed 5.2, Class A (International Emissions)
- CISPR 24:A2:2003 Class A (International Immunity)
- IEC 61000-4-2:2008/EN 61000-4-2:2009 Electrostatic Discharge, 8kV Contact, 15 kV Air, Criteria A
- IEC 61000-4-3:2008/EN 61000-4-3:2006+A1:2008 Radiated Immunity 10V/m, Criteria A
- IEC 61000-4-4:2004 am1 ed.2./EN 61000-4-4:2004/A1:2010 Transient Burst, 1 kV, Criteria A

Technical Specifications

International EMC Certifications (continued)

- IEC 61000-4-5:2005 /EN 61000-4-5:2006 Surge, 2 kV L-L, 2 kV L-G, Level 3, Criteria A
- IEC 61000-4-6:2008/EN 61000-4-6:2009 Conducted Immunity, 0.15-80 MHz, 10V/m unmod. RMS, Criteria A
- IEC/EN 61000-4-11:2004 Power Dips & Interruptions, >30%, 25 periods, Criteria C

Country Specific

- VCCI Class A (Japan Emissions)
- ACMA (C-Tick) (Australia Emissions)
- CCC Mark
- KCC Mark, EMC Approval (Korea)

Telecom Standards

- ETSI EN 300 386:2001 (EMC Telecommunications)
- ETSI EN 300 019 (Environmental for Telecommunications)
- NEBS Level 3 compliant to portions of GR-1089 Issue 4 & GR-63 Issue 3 as defined in SR3580 with exception to filter requirement
- MEF 9 compliant
- MEF 14 compliant

IEEE 802.3 Media Access Standards

- IEEE 802.3ab 1000BASE-T
- IEEE 802.3z 1000BASE-X
- IEEE 802.3ae 10GBASE-X
- IEEE 802.3at PoE Plus

Environmental Data

Environmental Standards

- EN/ETSI 300 019-2-1 v2.1.2 - Class 1.2 Storage
- EN/ETSI 300 019-2-2 v2.1.2 - Class 2.3 Transportation
- EN/ETSI 300 019-2-3 v2.1.2 - Class 3.1e Operational
- EN/ETSI 300 753 (1997-10) - Acoustic Noise
- ASTM D3580 Random Vibration Unpackaged 1.5 G

Operating Conditions Temperature Range

Summit X460-24t, X460-48t, X460-24x, and X460-48x

- 0° C to 45° C (32° F to 113° F)

Summit X460-24p, X460-48p

- 0° C to 40° C (32° F to 104° F)
- Humidity: 10% to 95% relative humidity, non-condensing
- Altitude: 0 to 3,000 meters (9,850 feet)
- Shock (half sine): 30 m/s² (3 G), 11 ms, 60 shocks
- Random vibration: 3 to 500 Hz at 1.5 G rms

Warranty

- Ltd. Lifetime with express Advanced Hardware Replacement
- For warranty details, visit <http://www.extremenetworks.com/go/warranty>

Weight and Physical Dimensions

Switch Model	Weight	Physical Dimension
Summit X460-24t/24tDC switch	12.8 lb (5.81 kg)	Height: 1.73 inches (4.4 cm) Width: 17.4 inches (44.1 cm) Depth: 17.0 inches (43.2 cm)
Summit X460-48t/48tDC switch	13.6 lb (6.15 kg)	
Summit X460-24x/24xDC switch	13.2 lb (6.01 kg)	
Summit X460-48x/48xDC switch	14.1 lb (6.4 kg)	
Summit X460-24p switch	13.1 lb (5.94 kg)	
Summit X460-48p switch	13.9 lb (6.3 kg)	
XGM3-2sf module	0.463 lb (0.21 kg)	Height: 1.4 inches (3.55 cm) Width: 2.91 inches (7.4 cm) Depth: 4.93 inches (12.5 cm)
SummitStack module	0.419 lb (0.19 kg)	Height: 1.4 inches (3.55 cm) Width: 3.39 inches (8.6 cm) Depth: 4.93 inches (12.5 cm)
SummitStack-V80 module	0.529 lb (0.24 kg)	Height: 1.4 inches (3.55 cm) Width: 3.39 inches (8.6 cm) Depth: 4.93 inches (12.5 cm)
Summit X460 fan module	0.661 lb (0.30 kg)	Height: 1.63 inches (4.15 cm) Width: 3.25 inches (8.26 cm) Depth: 4.93 inches (12.53 cm)

NOTE: Switch weights include installed fan module. They do not include installed VIM2 modules or PSUs.

** Please refer to the Summit Family Switches Hardware Installation Guide for packaged weight and dimensions.*

Acoustic Noise

Switch Model	Acoustic Noise
Summit X460-24t	43.3dB/63dB
Summit X460-48t	43.3dB/63.9dB
Summit X460-24p	42.9dB/62.9dB
Summit X460-48p	42.9dB/62.9dB
Summit X460-24x	43.3dB/63dB
Summit X460-48x	43.3dB/63.9dB
Summit X460-24tDC	43.3dB/63dB
Summit X460-48tDC	43.3dB/63.9dB
Summit X460-24xDC	43.3dB/63dB
Summit X460-48xDC	43.3dB/63.9dB

Technical Specifications

Power Specifications

Summit X460 with No Installed Option Card or Stacking Module

Switch Model	Nominal input ratings	Input current	Heat dissipation	Power consumption
Summit X460-24t	100 to 240 V, 50/60 Hz, 1 A	0.9 A @ 100 V (low-line) 0.45 A @ 240 V (high-line)	83 W, 284 BTU/hr	83 W, 284 BTU/hr
Summit X460-48t	100 to 240 V, 50/60 Hz, 1.25 A	1.1 A @ 100 V (low-line) 0.5 A @ 240 V (high-line)	105 W, 359 BTU/hr	105 W, 359 BTU/hr
Summit X460-24p	100 to 240 V, 50/60 Hz, 5.25 A per PSU	4.9 A @ 100 V per PSU (low-line) 2.0 A @ 240 V per PSU (high-line)	202 W, 690 BTU/hr per PSU	481 W, 1650 BTU/hr per PSU 962 W, 3284 BTU/hr (dual PSU)
Summit X460-48p	100 to 240 V, 50/60 Hz, 5.5 A per PSU	5.0 A @ 100 V per PSU (low-line) 2.1 A @ 240 V per PSU (high-line)	221 W, 755 BTU/hr per PSU	493W, 1682 BTU/hr per PSU 986 W, 3364 BTU/hr (dual PSU)
Summit X460-24x	100 to 240 V, 50/60 Hz, 1 A	0.9 A @ 100 V (low-line) 0.45 A @ 240 V (high-line)	89 W, 304 BTU/hr	89 W, 304 BTU/hr
Summit X460-48x	100 to 240 V, 50/60 Hz, 1.2 A	1.1 A @ 100 V (low-line) 0.5 A @ 240 V (high-line)	101 W, 345 BTU/hr	101 W, 345 BTU/hr
Summit X460-24tDC	48VDC, 2 A	1.3 A @ 48 VDC (low-line) 1.15 A @ 60 VDC (high-line)	67.8 W, 324 BTU/hr	67.8 W, 324 BTU/hr
Summit X460-48tDC	48VDC, 2 A	1.9 A @ 48 VDC (low-line) 1.6 A @ 60 VDC (high-line)	88 W, 302 BTU/hr	88 W, 302 BTU/hr
Summit X460-24xDC	48VDC, 1.75 A	1.5 A @ 48 VDC (low-line) 1.3 A @ 60 VDC (high-line)	74 W, 253 BTU/hr	74 W, 253 BTU/hr
Summit X460-48xDC	48VDC, 2.25 A	2.1 A @ 48 VDC (low-line) 1.8 A @ 60 VDC (high-line)	107 W, 365 BTU/hr	107 W, 365 BTU/hr

Summit X460 with SummitStack Module

Switch Model	Nominal input Ratings	Input Current	Heat Dissipation	Power Consumption
Summit X460-24t	100 to 240 V, 50/60 Hz, 1.25 A	0.9 A @ 100 V (low-line) 0.45 A @ 240 V (high-line)	84 W, 287 BTU/hr	84 W, 287BTU/hr
Summit X460-48t	100 to 240 V, 50/60 Hz, 1.25 A	1.1 A @ 100 V (low-line) 0.5 A @ 240 V (high-line)	107 W, 365 BTU/hr	107 W, 365 BTU/hr
Summit X460-24p	100 to 240 V, 50/60 Hz, 5.25 A per PSU	4.9 A @ 100 V per PSU (low-line) 2.0 A @ 240 V per PSU (high-line)	209 W, 714 BTU/hr per PSU	485 W, 1655 BTU/hr per PSU 970 W, 3310 BTU/hr (dual PSU)
Summit X460-48p	100 to 240 V, 50/60 Hz, 5.5 A per PSU	5.0 A @ 100 V per PSU (low-line) 2.1 A @ 240 V per PSU	223 W, 760 BTU/hr per PSU	497W, 1696 BTU/hr per PSU 994 W, 3392 BTU/hr (dual PSU)
Summit X460-24x	100 to 240 V, 50/60 Hz, 1.25 A	0.9 A @ 100 V (low-line) 0.45 A @ 240 V (high-line)	89 W, 304 BTU/hr	89 W, 304 BTU/hr
Summit X460-48x	100 to 240 V, 50/60 Hz, 1.25 A	1.1 A @ 100 V (low-line) 0.5 A @ 240 V (high-line)	101 W, 345 BTU/hr	101 W, 345 BTU/hr
Summit X460-24tDC	48VDC, 1.5 A	1.35 A @ 48 VDC (low-line) 1.15 A @ 60 VDC (high-line)	68 W, 232 BTU/hr	68 W, 232 BTU/hr
Summit X460-48tDC	48VDC, 2 A	1.9 A @ 48 VDC (low-line) 1.6 A @ 60 VDC (high-line)	89 W, 304 BTU/hr	89 W, 304 BTU/hr
Summit X460-24xDC	48VDC, 1.75 A	1.5 A @ 48 VDC (low-line) 1.3 A @ 60 VDC (high-line)	75 W, 256 BTU/hr	75 W, 256 BTU/hr
Summit X460-48xDC	48VDC, 2.25 A	2.1 A @ 48 VDC (low-line) 1.8 A @ 60 VDC (high-line)	107 W, 365 BTU/hr	107 W, 365 BTU/hr

Technical Specifications

Summit X460 with SummitStack-V80 Module

Switch Model	Nominal input Ratings	Input Current	Heat Dissipation	Power Consumption
Summit X460-24t	100 to 240 V, 50/60 Hz, 1.25 A	0.9 A @ 100 V (low-line) 0.45 A @ 240 V (high-line)	95 W, 324 BTU/hr	95 W, 324 BTU/hr
Summit X460-48t	100 to 240 V, 50/60 Hz, 1.25 A	1.16 A @ 100 V (low-line) 0.55 A @ 240 V (high-line)	121 W, 414 BTU/hr	121 W, 414 BTU/hr
Summit X460-24p	100 to 240 V, 50/60 Hz, 5.5 A per PSU	4.9 A @ 100 V per PSU (low-line) 2.1 A @ 240 V per PSU (high-line)	218 W, 744 BTU/hr per PSU	489 W, 1669 BTU/hr per PSU 978 W, 3338 BTU/hr per PSU
Summit X460-48p	100 to 240 V, 50/60 Hz, 5.5 A per PSU	5.1 A @ 100 V per PSU (low-line) 2.1 A @ 240 V per PSU (high-line)	242 W, 826 BTU/hr per PSU	501 W, 1710 BTU/hr per PSU 1002 W, 3420 BTU/hr (dual PSU)
Summit X460-24x	100 to 240 V, 50/60 Hz, 1.25 A	1.0 A @ 100 V (low-line) 0.5 A @ 240 V (high-line)	98 W, 335 BTU/hr	98 W, 335 BTU/hr
Summit X460-48x	100 to 240 V, 50/60 Hz, 1.25 A	1.1 A @ 100 V (low-line) 0.6 A @ 240 V (high-line)	109 W, 373 BTU/hr	109 W, 373 BTU/hr
Summit X460-24tDC	48VDC, 1.75 A	1.5 A @ 48 VDC (low-line) 1.3 A @ 60 VDC (high-line)	77 W, 263 BTU/hr	77 W, 263 BTU/hr
Summit X460-48tDC	48VDC, 2.25 A	2.0 A @ 48 VDC (low-line) 1.7 A @ 60 VDC (high-line)	101 W, 345 BTU/hr	101 W, 345 BTU/hr
Summit X460-24xDC	48VDC, 2 A	1.7 A @ 48 VDC (low-line) 1.5 A @ 60 VDC (high-line)	86 W, 293 BTU/hr	86 W, 293 BTU/hr
Summit X460-48xDC	48VDC, 2.5 A	2.3 A @ 48 VDC (low-line) 1.9 A @ 60 VDC (high-line)	114 W, 389 BTU/hr	114 W, 389 BTU/hr

Summit X460 with XGM3-2sf Module

Switch Model	Nominal input Ratings	Input Current	Heat Dissipation	Power Consumption
Summit X460-24t	100 to 240 V, 50/60 Hz, 1.25 A	0.9 A @ 100 V (low-line) 0.45 A @ 240 V (high-line)	94 W, 320 BTU/hr	94 W, 320BTU/hr
Summit X460-48t	100 to 240 V, 50/60 Hz, 1.25 A	1.15 A @ 100 V (low-line) 0.55 A @ 240 V (high-line)	119 W, 406 BTU/hr	119 W, 406 BTU/hr
Summit X460-24p	100 to 240 V, 50/60 Hz, 5.25 A per PSU	4.9 A @ 100 V per PSU (low-line) 2.0 A @ 240 V per PSU (high-line)	213 W, 727 BTU/hr per PSU	488 W, 1668 BTU/hr per PSU 976 W, 3336 BTU/hr(dual PSU)
Summit X460-48p	100 to 240 V, 50/60 Hz, 5.5 A per PSU	5.0 A @ 100 V per PSU (low-line) 2.1 A @ 240 V per PSU (high-line)	234 W, 799 BTU/hr per PSU	497W, 1696 BTU/hr per PSU 994 W, 3392 BTU/hr (dual PSU)
Summit X460-24x	100 to 240 V, 50/60 Hz, 1.25 A	1.0 A @ 100 V (low-line) 0.5 A @ 240 V (high-line)	97 W, 332 BTU/hr	97 W, 332 BTU/hr
Summit X460-48x	100 to 240 V, 50/60 Hz, 1.25 A	1.1 A @ 100 V (low-line) 0.6 A @ 240 V (high-line)	109 W, 373 BTU/hr	109 W, 373 BTU/hr
Summit X460-24tDC	48VDC, 1.75 A	1.45 A @ 48 VDC (low-line) 1.25 A @ 60 VDC (high-line)	75 W, 256 BTU/hr	75 W, 256 BTU/hr
Summit X460-48tDC	48VDC, 2.25 A	2.0 A @ 48 VDC (low-line) 1.7 A @ 60 VDC (high-line)	99 W, 338 BTU/hr	99 W, 338 BTU/hr
Summit X460-24xDC	48VDC, 1.75 A	1.7 A @ 48 VDC (low-line) 1.5 A @ 60 VDC (high-line)	85 W, 291 BTU/hr	85 W, 291 BTU/hr
Summit X460-48xDC	48VDC, 2.5 A	2.2 A @ 48 VDC (low-line) 1.9 A @ 60 VDC (high-line)	110 W, 376 BTU/hr	110 W, 376 BTU/hr

Technical Specifications

Summit X460 with SummitStack Module and XGM3-2sf Module

Switch Model	Nominal input Ratings	Input Current	Heat Dissipation	Power Consumption
Summit X460-24t	100 to 240 V, 50/60 Hz, 1.25 A	0.9 A @ 100 V (low-line) 0.45 A @ 240 V (high-line)	95 W, 324 BTU/hr	95 W, 324BTU/hr
Summit X460-48t	100 to 240 V, 50/60 Hz, 1.25 A	1.16 A @ 100 V (low-line) 0.55 A @ 240 V (high-line)	121 W, 414 BTU/hr	121 W, 414 BTU/hr
Summit X460-24p	100 to 240 V, 50/60 Hz, 5.5 A per PSU	4.9 A @ 100 V per PSU (low-line) 2.1 A @ 240 V per PSU (high-line)	218 W, 744 BTU/hr per PSU	489 W, 1669 BTU/hr per PSU 978 W, 3338 BTU/hr (dual PSU)
Summit X460-48p	100 to 240 V, 50/60 Hz, 5.5 A per PSU	5.0 A @ 100 V per PSU (low-line) 2.1 A @ 240 V per PSU (high-line)	242 W, 826 BTU/hr per PSU	501W, 1710 BTU/hr per PSU 1002 W, 3420 BTU/hr (dual PSU)
Summit X460-24x	100 to 240 V, 50/60 Hz, 1.2 5 A	1.0 A @ 100 V (low-line) 0.5 A @ 240 V (high-line)	99 W, 338 BTU/hr	99 W, 338 BTU/hr
Summit X460-48x	100 to 240 V, 50/60 Hz, 1.25 A	1.1 A @ 100 V (low-line) 0.6 A @ 240 V (high-line)	110 W, 376 BTU/hr	110W, 376 BTU/hr
Summit X460-24tDC	48VDC, 1.75 A	1.5 A @ 48 VDC (low-line) 1.3 A @ 60 VDC (high-line)	77 W, 263 BTU/hr	77 W, 263 BTU/hr
Summit X460-48tDC	48VDC, 2.25 A	2.0 A @ 48 VDC (low-line) 1.7 A @ 60 VDC (high-line)	101 W, 345 BTU/hr	101 W, 345 BTU/hr
Summit X460-24xDC	48VDC, 2 A	1.7 A @ 48 VDC (low-line) 1.5 A @ 60 VDC (high-line)	85 W, 291 BTU/hr	85 W, 291 BTU/hr
Summit X460-48xDC	48VDC, 2.5 A	2.3 A @ 48 VDC (low-line) 1.9 A @ 60 VDC (high-line)	114 W, 389 BTU/hr	114 W, 389 BTU/hr

Summit X460 with SummitStack-V80 Module and XGM3-2sf Module

Switch Model	Nominal input Ratings	Input Current	Heat Dissipation	Power Consumption
Summit X460-24t	100 to 240 V, 50/60 Hz, 1.25 A	0.9 A @ 100 V (low-line) 0.45 A @ 240 V (high-line)	103 W, 284 BTU/hr	103 W, 284 BTU/hr
Summit X460-48t	100 to 240 V, 50/60 Hz, 1.5 A	1.25 A @ 100 V (low-line) 0.6 A @ 240 V (high-line)	129 W, 443 BTU/hr	129 W, 443 BTU/hr
Summit X460-24p	100 to 240 V, 50/60 Hz, 5.5 A per PSU	5.0 A @ 100 V per PSU (low-line) 2.1 A @ 240 V per PSU (high-line)	226 W, 772 BTU/hr per PSU	493W, 1682 BTU/hr per PSU 986 W, 3364 BTU/hr (dual PSU)
Summit X460-48p	100 to 240 V, 50/60 Hz, 5.5 A per PSU	5.1 A @ 100 V per PSU (low-line) 2.1 A @ 240 V per PSU (high-line)	250 W, 854 BTU/hr per PSU	505 W, 1723 BTU/hr per PSU 1010 W, 3446 BTU/hr (dual PSU)
Summit X460-24x	100 to 240 V, 50/60 Hz, 1.25 A	1.1 A @ 100 V (low-line) 0.5 A @ 240 V (high-line)	107 W, 365 BTU/hr	107 W, 365 BTU/hr
Summit X460-48x	100 to 240 V, 50/60 Hz, 1.25 A	1.1 A @ 100 V (low-line) 0.6 A @ 240 V (high-line)	119 W, 406 BTU/hr	119 W, 406 BTU/hr
Summit X460-24tDC	48VDC, 2 A	1.7 A @ 48 VDC (low-line) 1.45 A @ 60 VDC (high-line)	85 W, 291 BTU/hr	85 W, 291 BTU/hr
Summit X460-48tDC	48VDC, 2.5 A	2.2 A @ 48 VDC (low-line) 1.9 A @ 60 VDC (high-line)	110 W, 376 BTU/hr	110 W, 376 BTU/hr
Summit X460-24xDC	48VDC, 2 A	1.9 A @ 48 VDC (low-line) 1.6 A @ 60 VDC (high-line)	93 W, 320 BTU/hr	93 W, 320 BTU/hr
Summit X460-48xDC	48VDC, 2.75 A	2.4 A @ 48 VDC (low-line) 2.1 A @ 60 VDC (high-line)	121 W, 414 BTU/hr	121 W, 414 BTU/hr

Technical Specifications

Power Supply Units

Summit X460 300W AC PSU (Model 10930)

Physical Specifications	
Dimensions	Height 40 mm (1.57 inches) Width 80 mm (3.15 inches) Depth 241.5 mm (9.5 inches)
Weight	2.30 lb (1 kg)
Power Specifications	
Voltage input range	85-264 VAC
Nominal input ratings	100 to 240 VAC, 50 to 60 Hz, 5 A
Nominal input current at full load	4.2 A at 90 VAC (low-line) 1.7 A at 230 VAC (high-line)
Line frequency range	47 to 63 Hz
Maximum inrush current	30 A
Output	12 VDC, 25 A maximum, 300 Watts 3.3 VDC, 3.03 A maximum, 10 Watts
Power Supply input socket	IEC 320 C14
Power cord input plug	IEC 320 C13
Power supply cord gauge	18 AWG (0.75 mm ²) up to 6 feet or 2 meters or 16 AWG (1.0 mm ²) over 6 feet
Efficiency	Low-line: 85% at 50% load and 88% at 100% load High-line: 86% at 50% load and 89% at 100% load
Environmental Specifications	
Operating Temperature	0 deg C to 45 deg C normal operation
Storage Temperature	-40 deg C to 70 deg C
Operating Humidity	20% to 90% relative humidity, non-condensing
Operational Shock	30 m/s ² (3g)

Summit X460 750W AC PSU (Model 10931) for PoE switches

Physical Specifications	
Dimensions	Height 40 mm (1.57 inches) Width 80 mm (3.15 inches) Depth 241.5 mm (9.5 inches)
Weight	2.25 lb
Power Specifications	
Voltage input range	85-264 VAC
Nominal input ratings	100 to 240 VAC, 50 to 60 Hz, 10 A
Nominal input current at full load	10 A at 90 VAC (low-line) 3.7 A at 230 VAC (high-line)
Line frequency range	47 to 63 Hz
Maximum inrush current	35 A
Output	12 VDC, 25 A maximum, 300 Watts 55 VDC, 8.18 A maximum, 450 Watts 3.3 VDC, 3.03 A maximum, 10 Watts
Power Supply input socket	IEC 320 C14
Power cord input plug	IEC 320 C13
Efficiency	Low Line: 88% at 50% load and 86% at 100% load High Line: 90% at 50% and 100% loads
Environmental Specifications	
Operating Temperature	0 deg C to 45 deg C normal operation
Storage Temperature	-40 deg C to 70 deg C
Operating Humidity	20% to 90% relative humidity, non-condensing
Operational Shock	30 m/s ² (3g)

Technical Specifications

Summit X460 300W DC PSU (Model 10934)

Physical Specifications	
Dimensions	Height 40 mm (1.57 inches) Width 80 mm (3.15 inches) Depth 241.5 mm (9.5 inches)
Weight	2.30 lb (1 kg)
Power Specifications	
Nominal Input	-40 to -72 VDC, 9 A
DC Voltage Input Range	-48 VDC
Maximum Input Amperages	9 A at 40 VDC 7.5 A at 48 VDC 5 A at 72 VDC
DC Output	12 VDC, 25 A/ 3.3 VDC, 3.03 A
DC Output Power (W)	310 W
Efficiency	87% at 50% and 100% loads at -48V input
Environmental Specifications	
Operating Temperature	0 deg C to 45 deg C normal operation
Storage Temperature	-40 deg C to 70 deg C
Operating Humidity	20% to 90% relative humidity, non-condensing
Operational Shock	30 m/s ² (3g)

Accessories

Summit X460 Power Supplies

All Summit X460 series switches come with one power supply. If redundancy or higher power Power-over-Ethernet plus capability is required, an additional power supply can be installed in the system.




Redundant AC/DC Power Supply

Summit 300W AC PSU	Summit 300W AC PSU is compatible with Summit X460-24t/48t/24x/48x switches.
Summit 750W PoE AC PSU	Summit 750W PoE AC PSU is compatible with Summit X460-24p/48p switches and provides 380 watts of PoE-plus power budget per one supply. When two PSUs are installed, the total PoE-plus power budget becomes 760 watts.
Summit 300W DC PSU	Summit 300W DC PSU is compatible with Summit X460-24tDC/48tDC/24xDC/48xDC switches.

Summit X460 Option Modules

Summit X460 series switches have two option module slots to support 10 Gigabit Ethernet and stacking modules. Slot A supports a two-port 10 Gigabit Ethernet module; Slot B supports stacking modules (SummitStack module or SummitStack-V80 module).

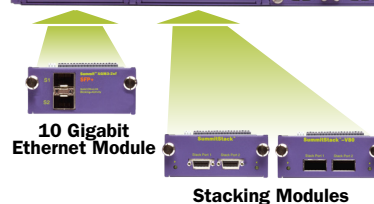

XGM3-2sf

2-port 10 Gigabit Ethernet module, provides two SFP+ ports. These two SFP+ ports can support both 10 Gigabit Ethernet SFP+ transceivers and Gigabit Ethernet transceivers.



SummitStack Module

SummitStack module has two SummitStack stacking ports, and provides a 40 Gigabit stacking solution. This stacking module offers compatibility with other Extreme Networks stackable switches, which are Summit X250e, Summit X450e, Summit X480 with VIM2-SummitStack, and Summit X650 with VIM1-SummitStack or VIM1-10G8X.



SummitStack-V80 Module

SummitStack-V80 module has two SummitStack-V80 stacking ports, and provides an 80 Gigabit stacking solution. SummitStack-V80 offers a variety of stacking cable solutions: QSFP+ passive copper cable for short distance, and QSFP+ active fiber cable for long distance up to 100 meters.



Ordering Information

Part Number	Name	Description
16401	Summit X460-24t	24 10/100/1000BASE-T, 8 100/1000BASE-X unpopulated SFP (4 SFP ports shared with 10/100/1000BASE-T ports), slot for optional XGM3 module(s), slot for optional stacking module, AC PSU with one unpopulated PSU slot, Fan module, ExtremeXOS Edge license
16402	Summit X460-48t	48 10/100/1000BASE-T, 4 100/1000BASE-X unpopulated SFP, slot for optional XGM3 module(s), slot for optional stacking module, AC PSU with one unpopulated PSU slot, Fan module, ExtremeXOS Edge license
16403	Summit X460-24p	24 10/100/1000BASE-T PoE, 8 100/1000BASE-X unpopulated SFP (4 SFP ports shared with 10/100/1000BASE-T ports), slot for optional XGM3 module(s), slot for optional stacking module, AC PoE PSU with one unpopulated PSU slot, Fan module, ExtremeXOS Edge license
16404	Summit X460-48p	48 10/100/1000BASE-T PoE, 4 100/1000BASE-X unpopulated SFP, slot for optional XGM3 module(s), slot for optional stacking module, AC PoE PSU with one unpopulated PSU slot, Fan module, ExtremeXOS Edge license
16405	Summit X460-24x	24 100/1000BASE-X unpopulated SFP, 8 10/100/1000BASE-T (4 10/100/1000BASE-T ports shared with SFP ports), slot for optional XGM3 module(s), slot for optional stacking module, AC PSU with one unpopulated PSU slot, Fan module, ExtremeXOS Edge license
16406	Summit X460-48x	48 100/1000BASE-X unpopulated SFP, slot for optional XGM3 module(s), slot for optional stacking module, AC PSU with one unpopulated PSU slot, Fan module, ExtremeXOS Edge license
16407	Summit X460-24tDC	24 10/100/1000BASE-T, 8 100/1000BASE-X unpopulated SFP (4 SFP ports shared with 10/100/1000BASE-T ports), slot for optional XGM3 module(s), slot for optional stacking module, DC PSU with one unpopulated PSU slot, Fan module, ExtremeXOS Edge license
16408	Summit X460-48tDC	48 10/100/1000BASE-T, 4 100/1000BASE-X unpopulated SFP, slot for optional XGM3 module(s), slot for optional stacking module, DC PSU with one unpopulated PSU slot, Fan module, ExtremeXOS Edge license
16409	Summit X460-24xDC	24 100/1000BASE-X unpopulated SFP, 8 10/100/1000BASE-T (4 10/100/1000BASE-T ports shared with SFP ports), slot for optional XGM3 module(s), slot for optional stacking module, DC PSU with one unpopulated PSU slot, Fan module, ExtremeXOS Edge license
16410	Summit X460-48xDC	48 100/1000BASE-X unpopulated SFP, slot for optional XGM3 module(s), slot for optional stacking module, DC PSU with one unpopulated PSU slot, Fan module, ExtremeXOS Edge license
16419	SummitStack module	SummitStack module for Summit X460
16420	SummitStack-V80 module	SummitStack-V80 module for Summit X460
16117	XGM3-2sf	Option card, two unpopulated 10 Gigabit SFP+ slots, compatible with Summit X460
16421	Summit X460 Advanced Edge Lic	ExtremeXOS Advanced Edge License for Summit X460 series switches
16422	Summit X460 Core License from Edge Lic	ExtremeXOS Advanced Core License upgrade from Edge License for Summit X460 series switches
16423	Summit X460 Core License from Advanced Edge	ExtremeXOS Advanced Core License upgrade from Advanced Edge License for Summit X460 series switches
16424	Summit X460 MPLS feature pack	ExtremeXOS MPLS Feature Pack for Summit X460 series switches
16125	Summit X460 Network Timing feature pack	ExtremeXOS Network Timing feature pack for Summit X460 series switches (supported on Summit X460-24x/24xDC/48x/48xDC)
11011	Direct Attach Feature Pack	Direct Attach Feature Pack
10930	Summit 300W AC PSU	AC Power Supply module for Summit X460 series switches
10931	Summit 750W PoE AC PSU	PoE AC Power Supply module for Summit X460 series switches
10934	Summit 300W DC PSU	DC Power Supply module for Summit X460 series switches

Ordering Information

Part Number	Name	Description
10935	Summit X460 fan module	Fan module for Summit X460 series switches, spare
10301	10GBASE-SR SFP+	10GBASE-SR SFP+, 850nm, LC Connector, transmission length of up to 300m on MMF
10302	10GBASE-LR SFP+	10GBASE-LR SFP+, 1310nm, LC Connector, transmission length of up to 10km on SMF
10309	10GBASE-ER SFP+	10GBASE-ER SFP+, 1550nm, LC connector, transmission length of up to 40km on SMF
10303	SFP+ LRM Module	10 Gigabit Ethernet SFP+ module, 1310nm, legacy MMF 220m link, LC connector
10304	10GBASE-CR SFP+ 1m	10GBASE-CR SFP+ pre-terminated twin-ax copper cable with link lengths of 1m
10305	10GBASE-CR SFP+ 3m	10GBASE-CR SFP+ pre-terminated twin-ax copper cable with link lengths of 3m
10306	10GBASE-CR SFP+ 5m	10GBASE-CR SFP+ pre-terminated twin-ax copper cable with link lengths of 5m
10307	10GBASE-CR SFP+ 10m	10GBASE-CR SFP+ pre-terminated twin-ax copper cable with link lengths of 10m
10051	1000BASE-SX SFP	1000BASE-SX SFP, LC Connector
10052	1000BASE-LX SFP	1000BASE-LX SFP, LC Connector
10053	1000BASE-ZX SFP	1000BASE-ZX SFP, Extra Long Distance SMF 70 km/21 dB Budget, LC Connector
10056	1000BASE-BX-D SFP	1000BASE-BX-D SFP, SMF (1490nm TX/1310nm RX Wavelength)
10057	1000BASE-BX-U SFP	1000BASE-BX-U SFP, SMF (1310nm TX/1490nm RX Wavelength)
10060	100FX/1000LX SFP ¹	100FX/1000LX SFP, SMF, LC Connector (Requires MCP and 6dB Attenuator for 100FX-MMF Operation)
10063	100FX SFP ¹	100FX SFP, MMF, LC Connector
10064	1000BASE-LX100 SFP	1000BASE-LX100 SFP, Extra Long Distance SMF 100 km/30dB Budget, LC Connector
10065	10/100/1000BASE-T SFP ¹	10/100/1000BASE-T, SFP, CAT 5 cable 100m, RJ-45 Connector
10067	100BASE-FX SFP	100M SFP, 100FX MMF, (1310nm, 2km multimode transmission) LC connector
10066	100BASE-LX10 SFP	100M SFP, 100LX10 SMF, (1310nm 10km single mode transmission) LC connector
10058	100BASE-BX-D SFP	100M SFP, 100BASE-BX-D, SMF (1550nm TX/1310nm RX wavelength), 100 Mbps bidirectional
10059	100BASE-BX-U SFP	100M SFP, 100BASE-BX-U, SMF (1310nm TX/1550nm RX wavelength), 100 Mbps bidirectional
10312	QSFP+ passive copper cable, 1.0M	QSFP+ passive copper cable, 1.0M
10315	QSFP+ active fiber cable, 10M	QSFP+ active fiber cable, 10M
10318	QSFP+ active fiber cable, 100M	QSFP+ active fiber cable, 100M
16106	Stacking Cable, 0.5M	SummitStack/UniStack™ Stacking Cable, 0.5M
16107	Stacking Cable, 1.5M	SummitStack/UniStack Stacking Cable, 1.5M
16108	Stacking Cable, 3.0M	SummitStack/UniStack Stacking Cable, 3.0M
16105	Stacking Cable, 5.0M ²	SummitStack Stacking Cable, 5.0M

¹ Not supported on Combo ports for Summit X460, Summit X450, Summit X450a and Summit X450e

² Not supported when using with Summit X650 or UniStack



Corporate and North America
 Extreme Networks, Inc.
 3585 Monroe Street
 Santa Clara, CA 95051 USA
 Phone +1 408 579 2800

Europe, Middle East, Africa and South America
 Phone +31 30 800 5100

Asia Pacific
 Phone +65 6836 5437

Japan
 Phone +81 3 5842 4011

extremenetworks.com